



Quick Disconnect/Cord Connection Instructions


Important - Read Carefully Before Installation

If your Kasco Fountain, Aerator, or Circulator has a 12 gauge power cord or larger, the cord has been shipped separate from the unit. The unit itself has a 30"+ stub cord with the male half of the Quick Disconnect. The cord that was shipped in a separate box has the female half of the Quick Disconnect.

To assemble the cord, the Quick Disconnect must be connected. Line up the pin assembly (male end) from the stub cord to the socket assembly (female end) on the cord and push together.



Once the two ends are together, tighten the large blue nut or collar to seal the connection. The blue nut or collar should be **HAND TIGHTENED ONLY!**

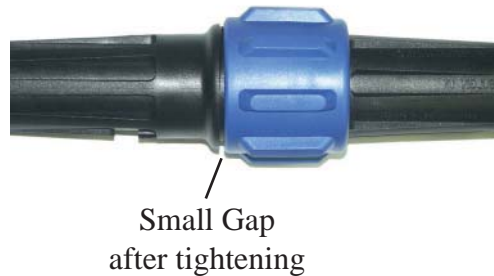

For seasonal removal, your Quick Disconnect includes an optional water tight cover. Simply separate the Quick Disconnect halves and insert the sealing cover into the large blue nut or collar and tighten firmly. The unit with the 30"+ stub cord can then be stored in a cool, dry place.

Kasco Marine, Inc.
800 Deere Rd.
Prescott, WI 54021
PH (715) 262-4488
FAX (715) 262-4487
www.kascomarine.com