



Bronze Fountain Light Kits

12V, 50Hz, Single Phase

(Uses 220V Mains)



Bronze Light with Thermoplastic Mounting Bracket and Brass Screws



Bronze Light Attached to Single Piece Float



Bronze Light Attached to 3-Piece Float

Light Kit Models

Quick Facts

- ⇒ Complete Package includes 2 or 3 Machined Bronze Fixtures each with 2m of Rubber Power Cable and Clear Tempered Glass Window, Thermoplastic Mounting Brackets with Brass Screws and Series 300 Stainless Steel Hardware, 2 or 3- 75W MR-16 Clear Halogen Bulbs, Potted Junction Box with remote transformer, and Rubber Stub Cord with Quick Disconnect and Strain Relief
- ⇒ Machined Bronze Fixture
- ⇒ Built In Thermal Overload Protection on Each Fixture
- ⇒ Built In Triple O-Ring Sealing on Each Fixture
- ⇒ Molded Junction Box with Heyco Connectors and Potted for Leak Prevention
- ⇒ Requires Only 2.5cm Submersion of Light Base
- ⇒ CE Marked
- ⇒ Bronze Construction of Exposed Metal; Salt Water Compatible
- ⇒ 2 Year Warranty
- ⇒ UPS Shippable
- ⇒ Energy Efficient, Low Voltage Lighting
- ⇒ Industrial Strength Design
- ⇒ Above Water Lens Position for Greater Light Penetration
- ⇒ Flex Sleeve Cord Protection

LE275

- ⇒ 2 Machined Bronze Fixtures with Thermoplastic Mounting Bracket, Brass Screws, and Series 300 Stainless Steel Hardware
- ⇒ Two 75W Clear MR-16 Halogen Bulbs
- ⇒ Sealed, potted junction box with two 75W lighting transformers with built in over temp, overload, and short circuit protection with automatic reset
- ⇒ Suggested for 2400EVFX, 3400EVFX, 2400EJF, & 3400EJF Models
- ⇒ Yellow, Green, Blue, and Red Colored 50W Bulb Options

LE375

- ⇒ 3 Machined Bronze Fixtures with Thermoplastic Mounting Bracket, Brass Screws, and Series 300 Stainless Steel Hardware
- ⇒ Three 75W Clear MR-16 Halogen Bulbs
- ⇒ Sealed, potted junction box with two 75W lighting transformers with built in over temp, overload, and short circuit protection with automatic reset
- ⇒ Can be used on any fountain model (Suggested for 4400EVFX, 3.1EVFX, 3.3EHVFX, 4400EJF, 8400EJF, 2.3EHJF, 3.1EJF, 3.3EHJF, & 5.3EHJF) Models
- ⇒ Two Sets of the LR375 can be added to any 8400EJF, 2.3EHJF, 3.1EVFX, 3.3EHVFX, 3.1EJF, 3.3EHJF, or 5.3EHJF with additional brackets
- ⇒ Yellow, Green, Blue, and Red Colored 50W Bulb Options

Kasco Bronze Fountain Lighting Package Specifications

Model #	Cord Length	Number of Fixtures	Lamp Volt/Phase/Hz (SELV)	Wattage Per Fixture	Total Wattage	Lens Position	Shipping Weight	Number of Boxes
LE275000	Stub	2	12/1/50	75	150	Above Water	7.7 kg	1
LE375000	Stub	3	12/1/50	75	225	Above Water	9 kg	1

Operation

- ⇒ The remote lighting transformer takes in 208-240V and produces 12V power to illuminate the MR-16 halogen bulbs.
- ⇒ Light passes through the clear, tempered glass lens that is positioned above the water level and onto the fountain pattern.
- ⇒ Can be used with timer or photo cell to control operation in conjunction with the fountain.



2 Light Kit Orientation on Float




3 Light Orientation on Float



Unit Pictured with 2 LE375 Light Kits

Use Warnings

- Max Water Temp of 35°C
- For Use in Non-Explosive Areas Only
- Do Not Operate Out of Water
- Discontinue use and remove when water is below 0°C.
- RCD (residual current device) or GFCI (ground fault circuit interrupter) protected circuit required

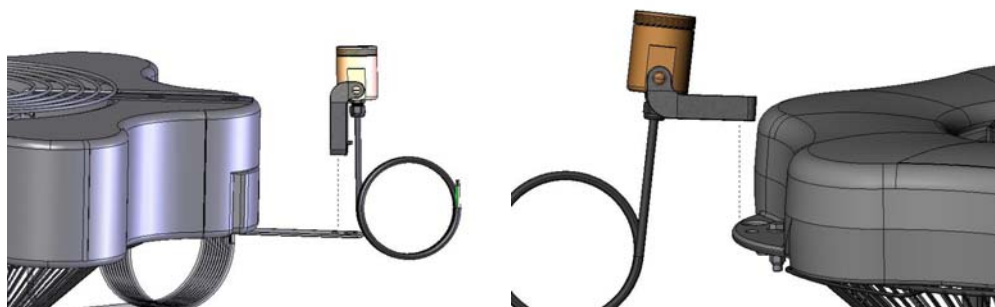

The light fixture bracket attaches to the float using stainless steel hardware for a secure assembly. The light can be angled and set in position using the brass set screws that hold the bracket to the fixture. The light fixture will not be completely submerged allowing for the lens to be above water and greater light penetration on the pattern.

Kasco Marine, Inc.
800 Deere Rd.
Prescott, WI 54021

Ph: 1-715-262-4488 * Fax: 1-715-262-4487
www.KascoMarine.com * www.GotAlgae.com
Sales@KascoMarine.com

